

Document Title:

## Structural Performance Certification Authorization Report

Doc No:		FRN	1 B1-	02	
Rev No:	7	Page:	1	Of:	1

Required By:

PRO B1-03

CAR & Product ID Number: 757 - 125.0

Issue Date: 10/27/2015
Revision Date: 1/15/2020
Expiration Date: 10/6/2023

Company Code: 757

This Certification Authorization Report (CAR) is issued by Keystone Certifications, Inc. (KCI) after full validation review, and is based on a standardized evaluation of the product conducted by an independent accredited laboratory in accordance with the specified referenced standard. Actual fenestration product performance may vary based on many factors, including installation, condition of the wall/roof substrate and the age of the product and installation components.

This report indicates the product is eligible for the application of Keystone Certification Program certification labels. Licensee stipulates in affixing certification labels to products, that those products are representative of the specimen evaluated and documented for certification authorization. Only products bearing such a certification label shall be considered certified. The information in this report can be verified at www.keystonecerts.com.

Licensee Information:	Product Information:
Pocahontas Aluminum Company, Inc.	Model: DD-100 Insulated Side-Hinged Door
2001 Industrial Drive, PO Box 756	Operator Type: SHD
Pocahontas, AR 72455	Config: No, Glazed Door
USA	Max Width: 36
	Max Height: 80

Referenced Standard:	Product Rating:
AAMA 1702.2-02 / FMHC&S Std. 3280.403	Wind Zone II @ 46 psf, 36x80 X

#### **Qualifying Test Information:**

Test Report No: ATI-F1393.01-801-44

Test Report Expiration: 10/6/2023

#### **Authorized Signature:**

Aaron Shultz 2020.01.15 06:52:43 -05'00' **Keystone Certifications, Inc.** 

145 Limekiln Rd. Suite 100B New Cumberland, Pennsylvania 17070 Phone: 717-932-8500

Fax: 717-932-8501





#### **TEST REPORT**

**Report No.**: F1393.01-801-44

#### Rendered to:


POCAHONTAS ALUMINUM COMPANY, INC. Pocahontas, Arkansas

**PRODUCT TYPE**: Insulated Side-Hinged Door **SERIES/MODEL**: DD 100

#### **SPECIFICATION:**

AAMA 1702.2-02, Voluntary Standard for Utilization in Manufactured Housing for Swinging Exterior Passage Doors.

ASTM E 330-02, Test Method for Structural Performance of Exterior Windows, Curtain Walls and Doors by Uniform Static Air Pressure Difference.




2015.10.26 17:11:21 -07'00'

**Test Date**: 09/24/15

**Report Date**: 10/06/15

**Record Retention End Date:** 09/24/19









**1.0 Report Issued To**: Pocahontas Aluminum Company, Inc.

2001 Industrial Drive P.O Box 756 Pocahontas, Arkansas 72455

**2.0 Test Laboratory**: Intertek-ATI

1909 10th Street Suite 100

Plano, Texas (469) 814-0687

#### **3.0 Project Summary**:

**3.1 Product Type**: Insulated Side-Hinged Door

3.2 Series/Model: DD 100

**3.3 Compliance Statement**: Results obtained are tested values and were secured by using the designated test method(s). The sample tested successfully met the performance requirements listed in the referenced specification(s).

**3.4 Test Date**: 09/24/2015

**3.5 Test Record Retention End Date**: All test records for this report will be retained until September 24, 2019.

**3.6 Test Location**: Intertek-ATI testing facility in Plano, Texas.

**3.7 Test Sample Source**: The test specimen was provided by the client.

3.8 List of Official Observers:

<u>Name</u> <u>Company</u>

Clint Barnett Architectural Testing, Inc.

Ken Akins Pocahontas Aluminum Company





#### 4.0 Test Specification(s):

AAMA 1702.2-02, Voluntary Standard for Utilization in Manufactured Housing for Swinging Exterior Passage Doors.

ASTM E 330-02, Test Method for Structural Performance of Exterior Windows, Curtain Walls and Doors by Uniform Static Air Pressure Difference.

#### **5.0 Test Specimen Description:**

#### **5.1 Product Sizes:**

**Test Specimen** 

1 cot op comici	· <del>-</del>			
Overall Area:	Width		Height	
$1.8 \text{ m}^2 (20 \text{ ft}^2)$	millimeters	inches	millimeters	inches
Overall size	914	36	2032	80
Door Leaf	914	36	2032	80

#### **5.2 Frame Construction:**

Frame Member	Material	Description
All members	Aluminum	Extruded Aluminum

	Joinery Type	Detail
All corners	Mitered & Welded	Thermally Welded





#### **5.0 Test Specimen Description**: (Continued)

#### **5.3 Leaf Construction:**

The 1-1/2" thick leaf was constructed of 1-3/8" thick foam with 1-3/8" wide by 3/4" high solid reinforcement along top and bottom rails and stiles. The reinforcement along the head and the lock stile was made of wood, with the remaining reinforcements made of cellular pvc. A 1/16" thick embossed fiberglass skin was utilized on the exterior and interior and was secured to the foam with glue. Leaf frame was formed from extruded aluminum members. Frame corners were coped, butted, and mechanically fastened using two #6 x 1" pan head Phillips screws. The interior of the exterior leg of the frame had vinyl fin weatherstripping inserted into it. The exterior leg of the frame was secured to the fiberglass skin with a sealant compound. A cellular PVC lock block was 4-1/4" x 15" x 1-3/8" thick.

Sash Member	Material	Description
All members	Aluminum	Extruded Vinyl

_	Joinery Type	Detail
All corners Coped	Canad O Buttad	Sealed and secured with two #6 x 1" Phillips
	Coped & Butted	head screws.


#### **5.4** Weatherstripping:

Description	Quantity	Location
0.110" x 0.160" pile	1 Row	Interior of exterior leg of leaf frame
0.187" x 0.250" pile	1 Row	Sash stile jamb face-interior lateral edge
0.187" x 0.250" pile	1 Row	Sash bottom rail sill face- interior lateral edge

**5.5 Glazing**: No conclusions of any kind regarding the adequacy or inadequacy of the glass in any glazed test specimen(s) can be made.

Glass Type	Glazing	Glazing Method
Monolithic	1/8 Tempered	Interior Wet Glazed

Location	Ougntity	Dayligh	Glass Bite	
Location	Quantity	millimeters	inches	Glass Bite
Door	1	486 x 889	19-1/8 x 35	0.50









#### **5.0 Test Specimen Description**: (Continued)

**5.6 Drainage**: No drainage was utilized.

#### **5.7** Hardware:

Description	Quantity	Location
Handle with lock	1	Lock stile of door leaf
Strike plate	1	Midpoint of lock jamb
Single barrel hinge	6	On center from interior corner of sill at 4-1/2", 12", 36", 43-1/2", 67-1/2" and 75"

#### **6.0 Installation**:

The specimen was installed into a Spruce-Pine-Fir wood buck. The rough opening allowed for a 1/4" shim space.

Location	Anchor Description	Anchor Location
Nail fin	#6 x 1-5/8" screw	4" from each corner and 8" on center thereafter





**7.0 Test Results**: The temperature during testing was 27°C (81°F). The results are tabulated as follows:

**Test Specimen** 

Results	Allowed	Note		
Pass	No damage	2, 3		
$0.10  \text{L/s/m}^2$	2.5 L/s/m <sup>2</sup>			
$(0.02 \text{ cfm/ft}^2)$	$(0.5 \text{ cfm/ft}^2) \text{ max.}$			
Pass	No leakage			
Optional Performance (24 CFR 3280.305(c))				
Pass	No damage	2, 3		
	Pass  0.10 L/s/m² (0.02 cfm/ft²)  Pass  erformance (24 CFR 32	Pass No damage  0.10 L/s/m <sup>2</sup> 2.5 L/s/m <sup>2</sup> (0.02 cfm/ft <sup>2</sup> ) (0.5 cfm/ft <sup>2</sup> ) max.  Pass No leakage  erformance (24 CFR 3280.305(c))		

Uniform Load Deflection,			
per ASTM E 330			
taken on lock stile			
+1440 Pa (+30.08 psf)	2 mm (0.06")		
-1440 Pa (-30.08 psf)	6 mm (0.24")	Report Only	1, 2, 3
Uniform Load Structural,			
per ASTM E 330			
taken on lock stile			
+2160 Pa (+45.11 psf)	< 1 mm (<0.01")	8 mm (0.31") max.	
-2160 Pa (-45.11 psf)	1 mm (0.04")	8 mm (0.31") max.	1, 2, 3

Note 1: With and without insect screen.

Note 2: Loads were held for 10 seconds.

Note 3: Tape and film were used to seal against air leakage during structural testing. In our opinion, the tape and film did not influence the results of the test.





Report No. F1393.01-801-44 Record Retention End Date: 09/24/19

Page 6 of 7

Architectural Testing will service this report for the entire test record retention period. Test records that are retained such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation will be retained by Architectural Testing, Inc. for the entire test record retention period.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. It is the exclusive property of the client so named herein and relates only to the specimen(s) tested. This report may not be reproduced, except in full, without the written approval of Architectural Testing, Inc.

For ARCHITECTURAL TESTING, Inc.

Digitally Signed by: Clint Barnett

Clint Barnett Technician Lylin Way


Digitally Signed by: Tyler Westerling

Tyler Westerling, P.E. Senior Project Engineer

CB:ac/ms/ss

Attachments (pages): This report is complete only when all attachments listed are included.

Appendix-A: Drawing(s) (9) Complete drawings packet on file with Architectural Testing, Inc.










#### **APPENDIX A**

#### **Drawings**

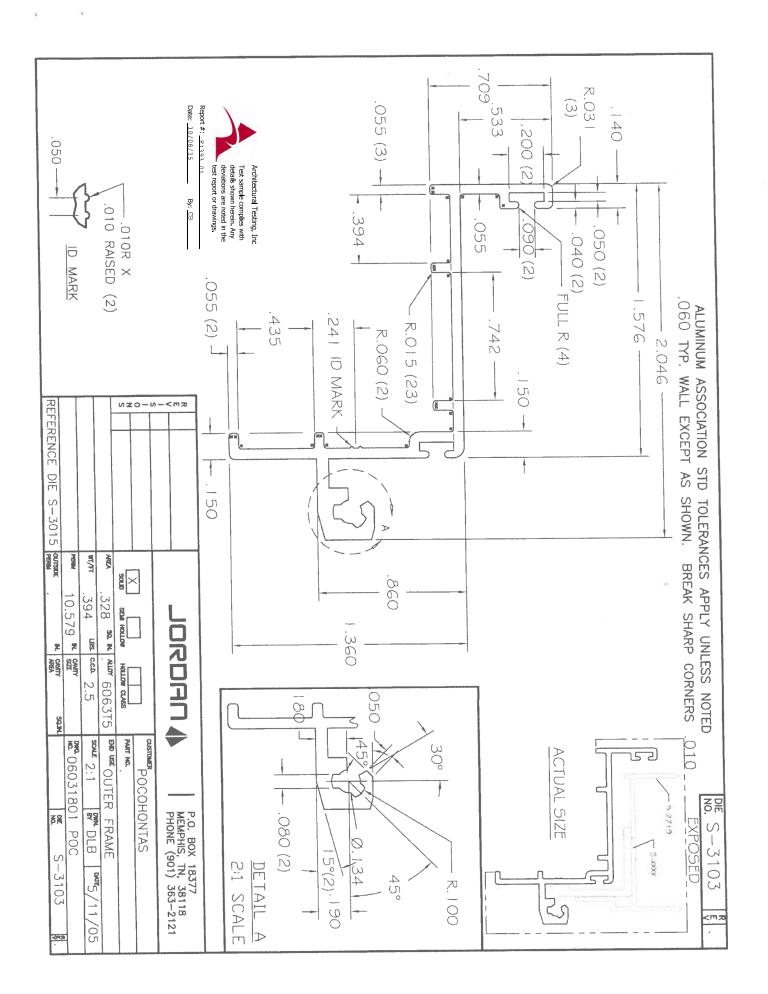



ALUMINUM ASSOCIATION STD TOLERANCES APPLY UNLESS NOTED .090 TYP. WALL EXCEPT AS SHOWN. BREAK SHARP CORNERS .010 No. S-2913 <m z



ACTUAL SIZE

ALL SURFACES EXPOSED

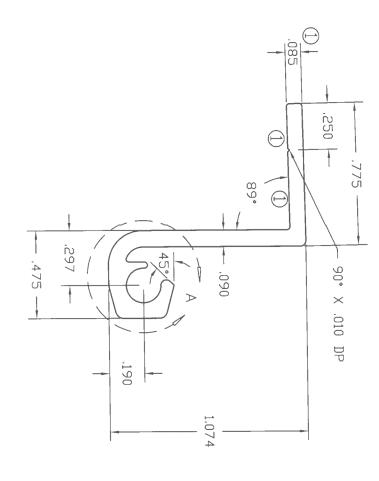

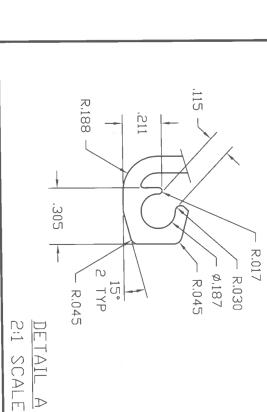


				υz	0-	ω –	< m zo
				6			REMOVE GROOVE AND ID MARK085 WAS .090 4/15/04 DLB
28	28	*	*				90 01 D
OUTSIDE	PMGA	ML/EL	ARKA		7		
	СП		: .				
	5.043	.259	.216	8			1
	13	H	y y	MOTTON INCIS	7		7
7	7	8	P	101	_		¥
BIL CAMTY AREA	IN. CAMITY	TBS: CCD.	VLLD	ğr	_		2
3	~		6	HOLTOM CIVES	4		닉
		1.6	300				#
Startes			St. N. , ALLOY 6063T5				
۲		<b>SCALE</b> 2:1	HINGE	PAR	S	1	
	26	2	A	PART NO.	CUSTOMER		
	2913S	-	I		PO		
	S		GE		POCOHONTAS		
高高		뭐			흐		PMP.
		ĮΞ.			1		ONE DE
0		ĮΣ			S		G S S
		9					2 <u>7</u> 8
		1 2	IJ				<u> </u>
9		13	l	1	l l		0,00
S-2913	1	3/24					8118 63-2
913	244	3/24/0					8118 63-2121
913		MDN 3/24/04					P.O. BOX 18377 MEMPHIS, TN, 38118 PHONE (901) 363-2121


Report #: \_F1393.01
Date: \_10/08/15


Ву: СВ

Test sample complies with details shown herein. Any deviations are noted in the test report or drawings.


Architectural Testing, Inc

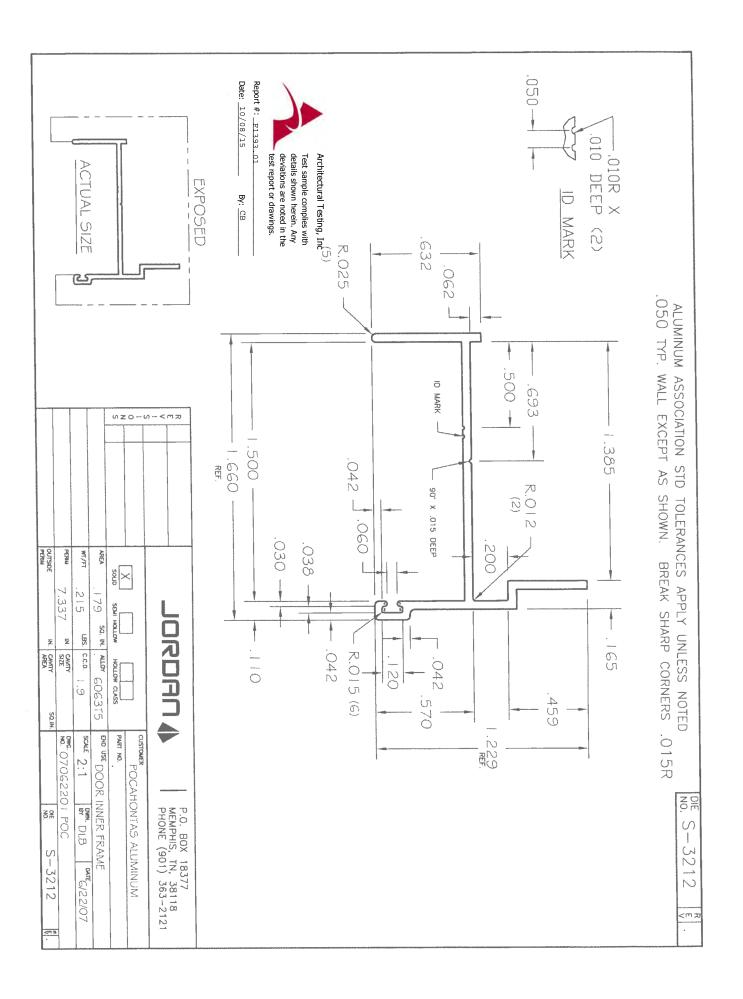


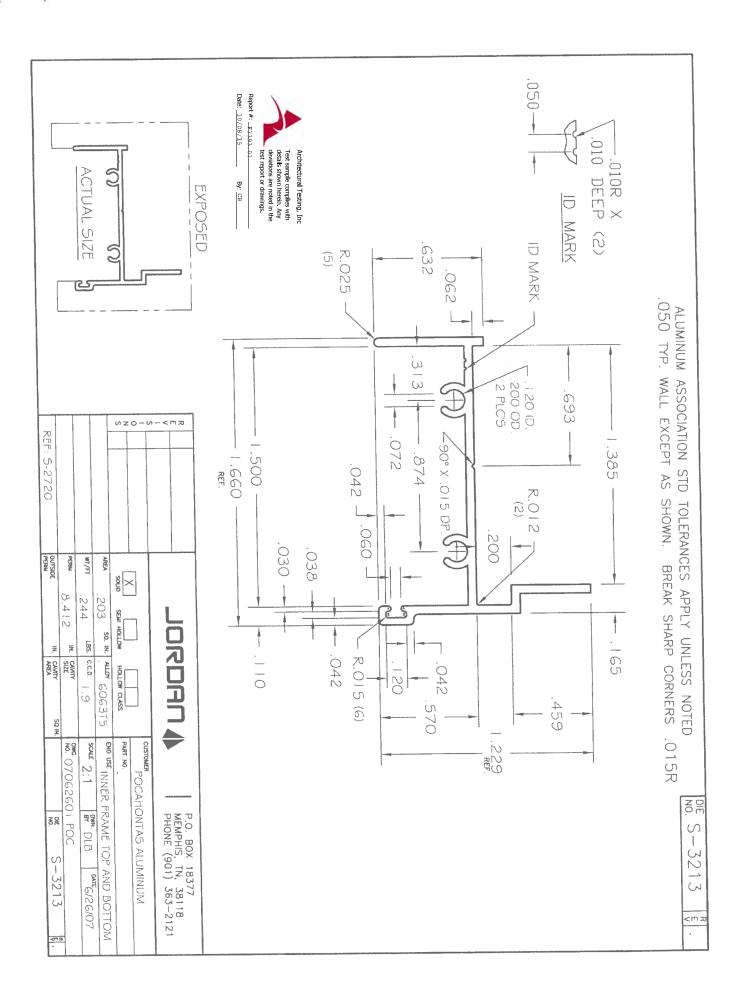


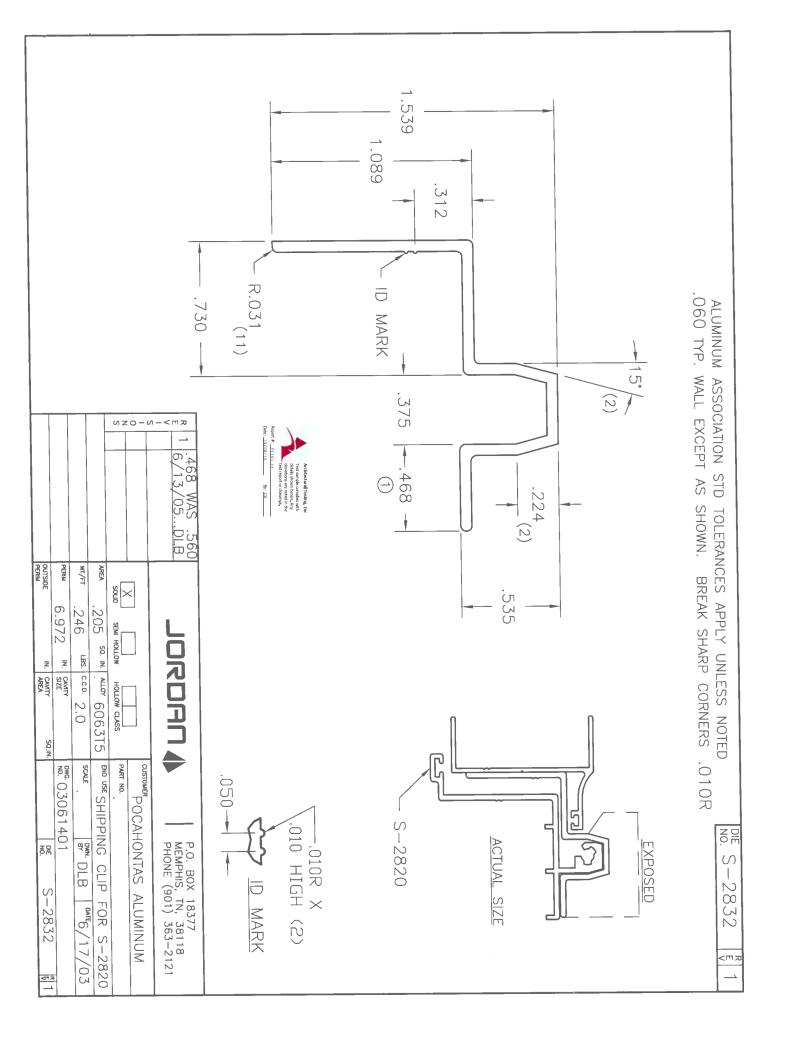

#### PVC LOCK BLOCK

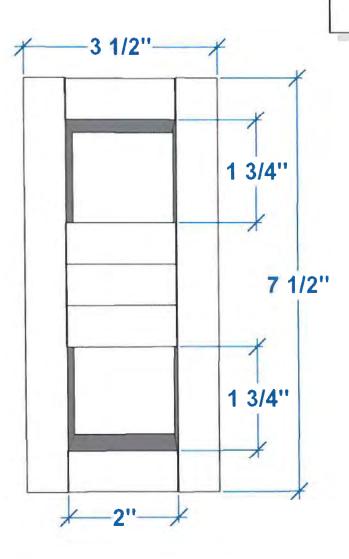

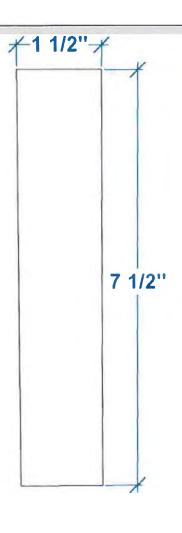

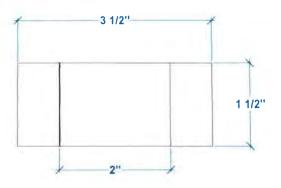



Architectural Testing, Inc

Test sample complies with details shown herein. Any deviations are noted in the test report or drawings.

Report #: \_F1393.01

Date: 10/08/15

By: CB

SCALE: NTS
DWN BY: AMM
CHK BY: KEA
DATE: 9/16/15

TITLE	
PVC LOCK BLOCK	

PREPARED BY:
POCAHONTAS ALUMINUM COMPANY, INC.
2001 INDUSTRIAL DRIVE
POCAHONTAS, AR 72455
PH: 870-892-3689 FAX: 870-892-9858

REVISIONS				
NO.	DESCRIPTION	BY	DATE	
H				

COPYING OR DUPLICATION IS PROHIBITED WITHOUT WRITTEN PREMISSION FROM POCAHONTAS ALUMINUM COMPANY, INC.



Prepared: 09/16/2015 13:22 Version: 6.0.029

# POCAHONTAS ALUMINUM COMPANY Indented B.O.M. Cost Summary Report

Page :

 $\vdash$ 

1 000001 02313500783411 1 000002 DD3680-IF 2 0000003 035161 2 0000003 DD3680-OF 2 0000003 DD3680-OF 2 0000003 DD3680-OF 2 0000001 015291217184 2 000002 015291217184 2 000005 0062913 2 000006 019226 2 000007 035163730 2 000008 0051286 1 000004 DD3680PVC-TED 2 000005 001507012 2 000005 00150777 2 000005 0021720 2 000005 00150744 3 000005 0021720 2 000005 0021720 2 000006 DD98EP-BS 3 000006 DD98EP-BS 2 000006 DD98EP-BS 2 000006 D35287540 2 000006 035287540 2 000008 0991248 2 000009 005111 2 000008 0991248		
DD 36 x 80 IS FRAME ASSY 100 IS SB 147" 100 IS SB 147" 100 IS SB 147" 100 IS FR 162" 6 x 1" #61PQAZ TOP RAIL VINYL IS DD 36 x 80 OS FRAME ASSY DD 36 x 80 OS FRAME ASSY DD OS FRAME 171" 1/8 DIA GALV.ROD BCY DD HINGE ASSY STRIKER PLATE BCV 6 x 3/8TRUS 638TPAZ #109 VINYL BULB DD 36 x 80 PVC ASSY TED PVC CODE #1038-RG 74" PVC CODE #1038-RG 74" PVC CODE #1038-RG 78" 5/8" STAPLE #1720 HOT MELT PVC CODE #1038-RG 44" 1/4X1-1/4" CRN STAPLE 1-3/8 x 1-11/16 x 2 NN 1-3/8x33-3/8x77 IN LARK 20x36 9-LT HP1-3/8 DD BS PREP ASSY DD SHIP CLIP DKE PAC LABEL 8 x 3/4" HWH 838HWABZ 8 x 3/4" HWH 834HWFZ 5/8" PLASTIC BAND 2"x4"x8' 3&4 MIX BOARD PLASTIC PLUGS DAUBOND CLEANER 8029047	escriptio	
	0 0 ₹	
1.000000 0.500000 1.000000 8.000000 1.000000	Route Qty per	
2.13000 4.22000 0.04752 0.29920 0.29920 0.29920 0.29920 0.29920 0.28160 2.10000 0.06900 0.06900 0.06900 0.116851 1.157900 3.32000 0.14496 2.67064 0.56684 0.52284 0.52284 0.03400 0.01000 4.89000 0.03400 0.03300 0.03300 0.03300 0.03300 0.03300 0.01390 0.01390 0.01392 0.04055 0.08533 0.04520 0.04520 0.04520	Material 77.29527 24.72000	
1.26540 0.00000 0.00000 0.00000 0.000000 0.000000	Labor and set-up 8.71340 0.00000	-
0.00000 0.00000	overhead 9.35034 0.00000	i
7.96212 2.13000 4.22000 0.04752 0.29920 19.50031 3.82000 8.17000 0.28160 2.10000 0.06900 0.00950 1.16851 15.06194 1.57900 3.32000 0.14496 2.67064 0.87559 0.52284 0.03400 0.01000 4.89000 16.22000 0.86850 0.28000 0.013390 0.013392 0.04520 0.04520 0.04520 0.04520 0.21160	var lotal head cost 95.35901 24.72000	

End of report



Test sample complies with details shown herein. Any deviations are noted in the test report or drawings. Architectural Testing, Inc

Date: 10/08/15 Report #: <u>F1393.01</u>

Ву: СВ

### Door Installation Instructions

- 1. Center door in opening (height and width)
- 2. Insert 1 screw in top hinge side of door, bottom hinge side of door, and middle hinge side of door
- 3. Remove screw from shipping clip to outside frame
- 4. Center frame on door knob side so gap at top and bottom are equal
- 5. Install rest of screws
- 6. remove shipping clip from inside frame



Architectural Testing, Inc

Test sample complies with details shown herein. Any deviations are noted in the test report or drawings.

Report #: \_\_F1393.01

Date: 10/08/15

By: <u>CB</u>

